



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: H01L	A2	(11) International Publication Number: WO 00/16377 (43) International Publication Date: 23 March 2000 (23.03.2000)
(21) International Application Number: PCT/KR99/00534 (22) International Filing Date: 10 September 1999 (10.09.1999) (30) Priority Data: 1998-37257 10 September 1998 (10.09.1998) KR 1998-48993 16 November 1998 (16.11.1998) KR (60) Parent Application or Grant GENITECH CO., LTD. [/]; O. YI, Kyoung-Soo [/]; O. KOH, Won-Yong [/]; O. KANG, Sang-Won [/]; O. YI, Kyoung-Soo [/]; O. KOH, Won-Yong [/]; O. KANG, Sang-Won [/]; O. HUH, Jin-Seok ; O.	Published	
(54) Title: METHOD FOR FORMING A THREE-COMPONENT NITRIDE FILM CONTAINING METAL AND SILICON (54) Titre: PROCEDE POUR FORMER UN FILM DE NITRURE A TROIS COMPOSANTS CONTENANT DU METAL ET DU SILICIUM		
(57) Abstract <p>A method for forming a three-component film containing metal, silicon and nitrogen for use in semiconductor devices on a substrate. The method of the present invention comprises the steps of: preparing separate reactive gases each including at least one selected from the group consisting of a gaseous metal compound, a gaseous silicon compound and an ammonia gas under conditions such that the gaseous metal compound and the ammonia gas does not form a mixture; determining a sequential gas supply cycle of the reactive gases so that supplies of the gaseous metal compound, the gaseous silicon compound and the ammonia gas are each included at least once within one gas supply cycle; and applying the reactive gases to the substrate by repeating the gas supply cycle at least once. According to the present invention, a three-component nitride film can be formed with a uniform thickness despite unevenness of a semiconductor substrate surface.</p> <p>(57) Abrégé</p> <p>L'invention concerne un procédé permettant de former un film à trois composants qui contient du métal, du silicium, et de l'azote, ce film étant destiné à être utilisé dans des dispositifs à semiconducteur placés sur un substrat. Le procédé de la présente invention consiste: à préparer des gaz réactifs séparés, chacun de ces gaz renfermant au moins un composé choisi dans le groupe constitué par un composé de métal gazeux, un composé de silicium gazeux, et un gaz ammoniacal, dans des conditions dans lesquelles ledit composé de métal gazeux et ledit gaz ammoniacal ne forment pas un mélange; à déterminer un cycle séquentiel d'alimentation de ces gaz réactifs de sorte que l'apport de chacun des composés de métal gazeux, de silicium gazeux, et de gaz ammoniacal s'effectue au moins lors d'un cycle d'alimentation; et enfin à appliquer ces gaz réactifs audit substrat, le cycle d'alimentation en gaz étant répété à une reprise au moins. Selon la présente invention, un film de nitrure à trois composants peut ainsi être formé, ce film présentant une épaisseur uniforme en dépit de l'aspect irrégulier de la surface du substrat à semiconducteur.</p>		

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : H01L	A2	(11) International Publication Number: WO 00/16377 (43) International Publication Date: 23 March 2000 (23.03.00)
<p>(21) International Application Number: PCT/KR99/00534</p> <p>(22) International Filing Date: 10 September 1999 (10.09.99)</p> <p>(30) Priority Data: 1998-37257 10 September 1998 (10.09.98) KR 1998-48993 16 November 1998 (16.11.98) KR</p> <p>(71) Applicant (for all designated States except US): GENITECH CO., LTD. [KR/KR]; 1694-5, Shinil-dong, Taedeok-gu, Taejon 306-230 (KR).</p> <p>(72) Inventors; and (73) Inventors/Applicants (for US only): YI, Kyoung-Soo [KR/KR]; 118-1506 Hanbit Apt., 99, Uheun-dong, Yusong-gu, Taejon 305-333 (KR). KOH, Won-Yong [KR/KR]; 105-605 Hanul Apt. 160-1, Shinsung-dong, Yusong-gu, Taejon 305-345 (KR). KANG, Sang-Won [KR/KR]; 133-1506 Hanbit Apt., 99, Uheun-dong, Yusong-gu, Taejon 305-333 (KR).</p> <p>(74) Agent: HUH, Jin-Seok; J.S. Huh Patent Office, 206 Sungji Building, 1338-22, Seocho-dong, Seocho-ku, Seoul 137-070 (KR).</p>		<p>(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>Without international search report and to be republished upon receipt of that report.</i></p>
<p>(54) Title: METHOD FOR FORMING A THREE-COMPONENT NITRIDE FILM CONTAINING METAL AND SILICON</p> <p>(57) Abstract</p> <p>A method for forming a three-component film containing metal, silicon and nitrogen for use in semiconductor devices on a substrate. The method of the present invention comprises the steps of: preparing separate reactive gases each including at least one selected from the group consisting of a gaseous metal compound, a gaseous silicon compound and an ammonia gas under conditions such that the gaseous metal compound and the ammonia gas does not form a mixture; determining a sequential gas supply cycle of the reactive gases so that supplies of the gaseous metal compound, the gaseous silicon compound and the ammonia gas are each included at least once within one gas supply cycle; and applying the reactive gases to the substrate by repeating the gas supply cycle at least once. According to the present invention, a three-component nitride film can be formed with a uniform thickness despite unevenness of a semiconductor substrate surface.</p> <div data-bbox="597 1129 1295 1318"><p>Flow Rate</p><p>1 cycle</p><p>a1 b1 c1 b1 d1 b1 a1 b1 c1 b1 d1 b1</p><p>Deposition Time</p></div> <div data-bbox="678 1346 1203 1486"><p>a1 : Ar carrier gas bubbled in tetrakisdimethylamidotitanium</p><p>b1 : Ar gas</p><p>c1 : ammonia gas</p><p>d1 : silane gas</p></div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Description

5

10

15

20

25

30

35

40

45

50

55

**METHOD FOR FORMING A THREE-COMPONENT
NITRIDE FILM CONTAINING METAL AND SILICON**

TECHNICAL FIELD

The present invention relates to a method for forming a film, and more particularly, to a method for forming a compound film of uniform thickness containing metal, silicon, and nitrogen for use in semiconductor devices on a substrate.

BACKGROUND ART

In the manufacture of semiconductor devices, a sputtered film of titanium nitride (TiN) is currently used as a diffusion barrier metal to prevent the diffusion of a metal interconnect into a silicon single crystal or an insulating layer. Additionally, the TiN is also used as a glue layer material to enhance adhesion when tungsten is used for forming an interconnect structure. However, a TiN film formed by sputtering or chemical deposition tends to have a columnar crystal structure, causing a problem that the metal interconnect material easily diffuses along its grain boundary. If a tungsten layer is formed on a TiN glue layer, the tungsten source gas WF_6 also easily diffuses along the grain boundary of the TiN layer to cause damage to the TiN glue layer.

Such problems can be alleviated by using a nano-crystalline material with extremely small grains or an amorphous material as a diffusion barrier material. A three-component nitride containing silicon and a refractory metal such as titanium, tantalum or tungsten is promising for such material.

With the trend to continue to miniaturize semiconductor integrated circuits to achieve submicron feature sizes, the width of an interconnect line becomes smaller and the aspect ratio of a contact hole becomes higher. Sputtering method is inadequate to form a film of a uniform thickness on such a structure because the method has a certain directivity. Accordingly, it is required that a uniform film of about 10nm thickness is formed on a surface having holes of high-aspect ratio, that is, on an extremely uneven surface even using other deposition methods. Although chemical deposition is typically used to form a uniform thickness film, good step

5 coverage can not be obtained under a chemical deposition condition that deposition
sources react violently in gas phases. Particularly in the case of using alkylamido
metal compound to chemically deposit a metal nitride film, the deposited metal
10 nitride film has a bad step coverage due to the reaction between gaseous alkylamido
metal compound and ammonia gas.

Unlike conventional chemical deposition methods where thin film sources
are simultaneously supplied on a substrate, the sequential deposition method where
15 the sources are sequentially supplied on a substrate enables formation of a uniform
thickness thin film because it can be formed only by chemical reaction of the
substrate surface. This method is well described in the following book; T. Suntola and
10 M. Simpson eds., *Atomic Layer Epitaxy*, Blackie, London, 1990. However, the
applications of this method have been limited to the formation of a two component
film or a composite oxide film containing more than three components.

25 15 DISCLOSURE OF INVENTION

Accordingly, it is an object of the present invention to provide a method for
forming a three-component nitride film containing metal and silicon for use in a
30 barrier layer which effectively prevents the diffusion of metal interconnects of
semiconductor devices.

20 Another object of the present invention is to provide a process by which a
three-component nitride film containing metal and silicon is formed with a uniform
35 thickness despite unevenness of a semiconductor substrate surface.

In order to accomplish the aforementioned object, the present invention
provides a method for forming a three-component nitride film containing metal and
40 25 silicon on a substrate, the method comprising the steps of: (a) preparing separate
reactive gases each including at least one selected from the group consisting of a
gaseous metal compound, a gaseous silicon compound and an ammonia gas under
conditions such that the gaseous metal compound and the ammonia gas does not form
45 a mixture; (b) determining a sequential gas supply cycle of the reactive gases so that
30 supplies of the gaseous metal compound, the gaseous silicon compound and the
ammonia gas are each included at least once within one gas supply cycle; and (c)
50 applying the reactive gases to the substrate by repeating the gas supply cycle at least

once.

The reactive gases include only five types of gases such as a gaseous metal compound, a gaseous silicon compound, an ammonia gas, a mixture of a gaseous metal compound and a gaseous silicon compound, a mixture of a gaseous silicon compound and an ammonia gas because gaseous metal compound and the ammonia gas react each other thus should not form a mixture.

BRIEF DESCRIPTION OF DRAWINGS

FIGS. 1A to 1C are graphs showing the gas supply cycles regardless of absolute magnitude in flow rate and deposition time according to the embodiments of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

In the embodiment of the present invention, various gas supply cycles can be determined as follows.

First, between the supplies of the reactive gases, supplies of a gas not reacting with any of the reactive gases are inserted. The respective reactive gas supplies of a gaseous metal compound, a gaseous silicon compound and an ammonia gas are preferably arranged in a cyclic permutation order, and supplies of a gas not reacting any of the three component gases are inserted therebetween. For example, the supply cycle may be determined to be "gaseous metal compound→non-reacting gas→gaseous silicon compound→non-reacting gas→ammonia gas→non-reacting gas" or "gaseous metal compound→non-reacting gas→ammonia gas→non-reacting gas→gaseous silicon compound→non-reacting gas", respectively. In the chemical deposition, such a supply cycle is repeated to form a film of desired thickness.

Second, because the reactive gases include gas mixtures, the respective supplies of reactive gases containing a gaseous metal compound and an ammonia gas are arranged within the supply cycle and supplies of a gas not reacting with any of the two reactive gases are inserted therebetween. Here, the reactive gas containing a metal compound may be a sole gaseous metal compound or a mixture of a gaseous metal compound and a gaseous silicon compound. Additionally, the same may be a reactive gas containing an ammonia gas. In this case, the supply cycle may be

5 determined, for example, to be "mixture of a gaseous metal compound and a gaseous
silicon compound→non-reacting gas→ammonia gas→non-reacting gas", "gaseous
10 metal compound→non-reacting gas→mixture of an ammonia gas and a gaseous
silicon compound→non-reacting gas", or "mixture of a gaseous metal compound and
5 a gaseous silicon compound→non-reacting gas→mixture of an ammonia gas and a
gaseous silicon compound→non-reacting gas", respectively. In the above methods of
15 determining supply cycle, the non-reacting gas is supplied to prevent the reaction of
reactive gases.

Third, a gaseous silicon compound, instead of a non-reacting gas, may be
10 used to prevent the vapor reaction between a gaseous metal compound and an
ammonia gas. Accordingly, the supply cycle is determined by inserting a gaseous
silicon compound between the respective supplies of the reactive gases containing a
metal compound and ammonia. For example, the respective reactive gas supplies of a
25 gaseous metal compound, a gaseous silicon compound and an ammonia gas are
arranged in a cyclic permutation order, and supplies of a gaseous silicon compound
15 are inserted therebetween. That is, the supply cycle may be "gaseous metal
compound→gaseous silicon compound→ammonia gas→gaseous silicon compound".
Instead of the above supply cycle, the supply cycle may be "mixture of a gaseous
30 metal compound and a gaseous silicon compound→gaseous silicon
compound→ammonia gas→gaseous silicon compound", "gaseous metal
20 compound→gaseous silicon compound→mixture of an ammonia gas and a gaseous
silicon compound→gaseous silicon compound", or "mixture of a gaseous metal
35 compound and a gaseous silicon compound→gaseous silicon compound→mixture of
an ammonia gas and a gaseous silicon compound→gaseous silicon compound". As
40 described above, the supplies of reactive gases, such as a gaseous silicon compound,
25 not reacting with other reactive gases can be inserted between the supplies of other
reactive gases to prevent vapor phase reactions.

45 Fourth, the supply cycles can be differently determined to control the
stoichiometric composition of a film during the deposition. The desired control of
30 stoichiometric composition provides better matches of physical properties between
the deposited film and the upper/lower layers thereof. Such physical properties

5 include a contact resistance, a step coverage, etc. For example, in the case of
depositing a three-component nitride film containing titanium and silicon on a
10 silicon-rich underlayer, a silicon-rich film ($\text{Ti}_x\text{Si}_y\text{N}$, $x < y$) is deposited in the early
stage of deposition to provide low contact resistance and then a titanium-rich film
5 ($\text{Ti}_x\text{Si}_y\text{N}$, $x > y$) is deposited in the late stage of deposition to reduce the film resistance
itself.

15 In order to form such a film, the supply cycle is determined to include
supplies of gaseous silicon compound more than those of gaseous metal compound in
the early stage of deposition whereas it is determined to include supplies of gaseous
20 metal compound more than those of gaseous silicon compound in the late stage of
deposition. For example, the supply cycle is determined to be "Si-N-Si-N-Ti-N-" in
the early stage of deposition, "Si-N-Ti-N-" in the middle stage of deposition, "Si-N-
Ti-N-Ti-N-" in the late stage of deposition, wherein Si is a gaseous silicon compound,
25 N is an ammonia gas, and Ti is a gaseous titanium compound. In the above supply
cycle, notation of non-reacting gas, which is supplied between the supplies of reactive
gases, was omitted.

30 In some cases, the supply cycle may be "Si-N-Ti-N-Ti-N-Ti-N-Ti-N-Ti-N-"
to lower the overall content of silicon in a deposited film while maintaining constant
composition of silicon. In the embodiments, the metal included in the metal
25 compound is preferably a refractory metal, and more preferably, the refractory metal
is titanium, tantalum, or tungsten. Additionally, the metal compound may be an
organometallic compound or a halogenated metallic compound. In the case of using
an organometallic compound, it is preferably an amido or imido compound of a metal.
More preferably, the amido compound of a metal is an amidotitanium compound and
40 most preferably the amidotitanium compound is tetrakisdimethylamidotitanium or
tetrakisiethylamidotitanium.

45 Likewise, for example, if tantalum tris-diethylamido-1-butyrimide is used as
a metal source, a three-component nitride film containing tantalum and silicon can be
obtained.

50 The silicon compound is preferably a compound comprised of hydrogen and
silicon, which is represented by $\text{Si}_n\text{H}_{2n-2}$, wherein n is a natural number of not more
than 5. Preferably, the non-reacting gas is H_2 , He, N_2 , or Ar.

5 In the chemical deposition step, the temperature of the substrate is preferably maintained lower than the thermal decomposition temperature of the metal compound to prevent the formation of a film with poor step coverage due to vapor phase reaction.

10 The present invention will be further described in the following examples and will be compared with other examples, but the present invention should not be construed as being limited thereto.

15 All the reactions were carried out in a reactor made of stainless steel. The pressure in the reactor during the deposition was 1 Torr, while the temperature of a silicon substrate contained in the reactor was maintained at 180°C. Tetrakisdimethylamidotitanium, a metallic source, was fed to the reactor by bubbling an argon carrier gas at a temperature of 25°C. The temperature of gas supply line was maintained at 100°C to prevent the condensation of the metallic source.

25 [example 1]

The cycle was comprised of sequential supplies of an argon carrier gas bubbled in tetrakisdimethylamidotitanium at a flow rate of 100 sccm for 5 seconds, an argon gas at a flow rate of 100sccm for 10 seconds, an ammonia gas at a flow rate of 143 sccm for 5 seconds, an argon gas at a flow rate of 100 sccm for 10 seconds, a silane (SiH₄) gas at a flow rate of 38sccm for 5 seconds, and an argon gas at a flow rate of 100 sccm for 10 seconds. The cycle was repeated by 200 times, as shown in FIG. 1A. Auger spectrum analysis of the deposited film indicated compositions of titanium, nitrogen, silicon, carbon, and oxygen with their specific peaks.

40 [example 2]

The cycle was comprised of sequential supplies of an argon carrier gas bubbled in tetrakisdimethylamidotitanium at a flow rate of 91 sccm mixed with a silane gas at a flow rate of 9sccm for 5 seconds, an ammonia gas at a flow rate of 143 sccm for 5 seconds, and an argon gas at a flow rate of 100 sccm for 10 seconds. The cycle was repeated by 200 times, as shown in FIG. 1B. Auger spectrum analysis of the deposited film indicated compositions of titanium, nitrogen, silicon, carbon, and oxygen with their specific peaks.

5

[example 3]

10

15

20

The cycle was comprised of sequential supplies of an argon carrier gas bubbled in tetrakisdimethylamidotitanium at a flow rate of 100 sccm for 5 seconds, an argon gas at a flow rate of 100 sccm for 10 seconds, an ammonia gas at a flow rate of 13 sccm mixed with a silane gas at a flow rate of 38 sccm for 5 seconds, and an argon gas at a flow rate of 100 sccm for 10 seconds. The cycle was repeated by 200 times, as shown in FIG. 1C. Auger spectrum analysis of the deposited film indicated compositions of titanium, nitrogen, silicon, carbon, and oxygen with their specific peaks.

[comparative example 1]

25

30

The cycle was comprised of sequential supplies of an argon carrier gas bubbled in tetrakisdimethylamidotitanium at a flow rate of 100 sccm for 5 seconds, an argon gas at a flow rate of 100 sccm for 10 seconds, a silane gas at a flow rate of 38 sccm for 5 seconds, and an argon gas at a flow rate of 100 sccm for 10 seconds. The cycle was repeated by 200 times, and no film, however, was formed on the silicon substrate.

[comparative example 2]

35

40

The cycle was comprised of sequential supplies of an ammonia gas at a flow rate of 143 sccm for 5 seconds, an argon gas at a flow rate of 100 sccm for 10 seconds, a silane gas at a flow rate of 38 sccm for 5 seconds, and an argon gas at a flow rate of 100 sccm for 10 seconds. The cycle was repeated by 200 times, and no film, however, was formed on the silicon substrate.

45

50

The comparative examples show that reactive gases of a gaseous metal compound, a gaseous silicon compound and an ammonia gas each should be included at least once within the gas supply cycle to form a three-component nitride film containing metal and silicon.

55

Claims

5

10

15

20

25

30

35

40

45

50

55

5

WHAT IS CLAIMED IS :

10

1. A method for forming a three-component nitride film containing metal and silicon on a substrate, said method comprising the steps of:

15

- 5 (a) preparing separate reactive gases each including at least one selected from the group consisting of a gaseous metal compound, a gaseous silicon compound and an ammonia gas under conditions such that the gaseous metal compound and the ammonia gas do not form a mixture;

20

- 10 (b) determining a sequential gas supply cycle of said reactive gases so that supplies of said gaseous metal compound, said gaseous silicon compound and said ammonia gas are each included at least once within one gas supply cycle; and

(c) applying said reactive gases to said substrate by repeating said gas supply cycle at least once.

25

- 15 2. The method of claim 1, wherein said one gas supply cycle comprises supplies of a gas not reacting with any of said reactive gases, each supply being inserted between the supplies of said reactive gases.

30

3. The method of claim 2, wherein the respective supply cycles are determined to include different times of reactive gas supplies to change the stoichiometric composition of said three-component nitride film, providing better matches of physical properties between said three-component nitride film and the upper/lower layers thereof.

35

40

- 25 4. The method of claim 3, wherein said chemical vapor deposition step is conducted by repeating supply cycles, said supply cycles each including relatively more gaseous silicon compound supplies in the early stage of said deposition step while said supply cycles each including relatively more gaseous metal compound supplies in the late stage of said deposition step, to reduce the contact resistance between said three-component nitride film and the upper/lower layers thereof.

45

30

50

5. The method of claim 2, wherein, within said one supply cycle, the respective

55

5 supplies of a gaseous metal compound, a gaseous silicon compound and an ammonia
gas are arranged in a cyclic permutation order, supplies of a gas not reacting any of
10 the three component gases being inserted between said reactive gas supplies.

5 6. The method of claim 1, wherein, within said one supply cycle, the respective
supplies of reactive gases containing a gaseous metal compound and an ammonia gas
15 are arranged, supplies of a gas not reacting with any of said two reactive gases being
inserted therebetween.

10 7. The method of claim 1, wherein, within said one supply cycle, the respective
supplies of reactive gases containing a gaseous metal compound and an ammonia gas
20 are arranged, supplies of a gaseous silicon compound being inserted therebetween.

25 8. The method of claim 1, wherein, within said one supply cycle, the respective
15 supplies of a gaseous metal compound, a gaseous silicon compound and an ammonia
gas are arranged in a cyclic permutation order, supplies of a gaseous silicon
compound being inserted therebetween.

30 9. The method of claim 1, wherein said metal is selected from the refractory metal
20 group consisting of titanium, tantalum and tungsten.

35 10. The method of claim 1, wherein said metal compound is an organometallic
compound.

40 11. The method of claim 1, wherein said metal compound is a halogenated metallic
25 compound.

45 12. The method of claim 10, wherein said organometallic compound includes at
least one amido or imido group.

30 13. The method of claim 12, wherein said amido-metallic compound is an amido-
50 titanium compound.

5

14. The method of claim 13, wherein said amido-titanium compound is tetrakisdimethylamidotitanium or tetrakisdialkylamidotitanium..

10

5 15. The method of claim 12, wherein said organometallic compound is tantalum tris-diethylamido-t-butylimide.

15

16. The method of claim 1, wherein said silicon compound is a compound comprised of hydrogen and silicon, which is represented by $\text{Si}_n\text{H}_{2n-2}$, wherein n is a natural number of not more than 5.

20

17. The method of claim 2, wherein said non-reacting gas is selected from the group consisting of H_2 , He, N_2 , and Ar.

25

15 18. The method of claim 1, wherein the temperature of said substrate is maintained lower than the thermal decomposition temperature of said metal compound during chemical deposition.

30

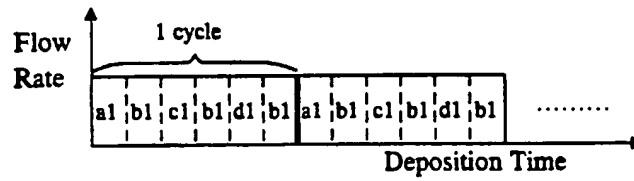
35

40

45

50

55

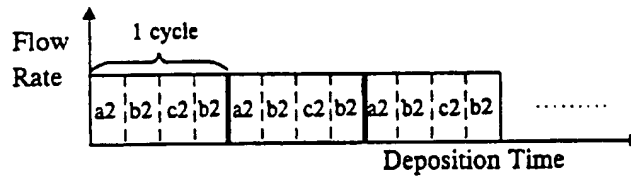
FIG. 1A

a1 : Ar carrier gas bubbled in tetrakisdimethylamidotitanium

b1 : Ar gas

c1 : ammonia gas

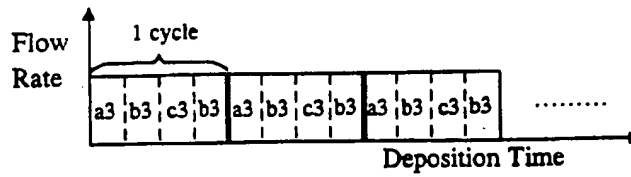
d1 : silane gas

FIG. 1B

a2 : Ar carrier gas bubbled in tetrakisdimethylamidotitanium
mixed with silane gas

b2 : Ar gas

c2 : ammonia gas

FIG. 1C

a3 : Ar carrier gas bubbled in tetrakisdimethylamidotitanium

b3 : Ar gas

c3 : mixture of ammonia gas and silane gas

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.